

ABB i-bus® KNX KNX Security Panel, SM GM/A 8.1, 2CDG110150R0011



Product description

The KNX Security Panel is used to manage up to 5 logical areas with up to 344 zones, of which 8 zones are integrated. The number of zones via the Security Bus S-Bus 1 is dependent on the current requirement (max. 800 mA) of the connected system components, cable length and cross-section. An additional 128 zones can be integrated via KNX. The network connection is used for parameterization, operation and display via the existing web server. The Panel possesses 4 outputs for the signaling device and 4 outputs for potential-free switching (12...30 V DC).

The integrated modem is used for private remote alarms using spoken messages, SMS (SMS center) and e mail. In addition, a system interface (ATS) allows the connection of an external ABB transmission device of the comXline series, for connection to a security company. It is possible to connect 2x18 Ah rechargeable batteries as critical power for up to 60 hours, in accordance with VdS, DIN EN and ISO/IEC.

The device can be used in systems with increased security requirements according to VdS Class A, B and C, DIN VDE 0833 Grade 1, 2, 3 and EN 50 131 / IEC 62 642 Grade 1, 2, 3.

ABB i-bus® KNX

KNX Security Panel, SM

GM/A 8.1, 2CDG110150R0011

Technical data

Mains supply (a separate circuit for the Panel is required)	Mains voltage range	85...265 V AC
	Mains frequency	50/60 Hz
	Output voltage	13.2 V DC \pm 0.5 V
	Intrinsic current consumption	Max. 300 mA (with modem and LAN)
	Secondary	Min. 250 mA (without modem and LAN)
	Power consumption	Max. 51 W
	Total power loss	Max. 9 W
Critical power (rechargeable battery)	Connection	2
	Battery type	12 V DC sealed lead-acid battery
	Battery capacity	18 Ah of type SAK17 per battery connection
	Charging end-voltage	13.8 V at 25 °C Temperature controlled charging voltage tracking takes place using a temperature sensor.
	Nominal charging current	1.8 A ($I_{Load} < 0.6$ A, no alarm) 1.2 A ($I_{Load} > 0.8$ A, no alarm) 0.1 A (alarm)
Input (temperature sensor)	Connection	1
	Type	KTY 10-6 or KTY 81/210 (contained in the accessories of the panel)
KNX	Bus voltage (KNX)	21...31 V DC, via KNX
	Current consumption (KNX)	< 6 mA
Inputs (zones)	Number	8
	No-load voltage	13.0 V DC
	Short circuit current	6 mA each
	Permissible line resistance	Max. 200 Ohms each
	Permitted cable length	Max. 500 m each
Outputs (12 V DC)	Number	1
	Output voltage	13.2 V DC \pm 0.5 V
	Output current	400 mA
	Short circuit current	750 mA
Outputs (relays)	Number	4
	Type	Bi-stable relays
	Nominal current	Max. 2 A
	Nominal voltage	12...24 V DC
Outputs (Signaling devices)	Number	4
	Output voltage	13.2 V DC + 0.5 V
	Output current	Each 350 mA (Siren 1, siren 2, strobe) 50 mA (internal siren)
	Short circuit current	Each 375 mA (Siren 1, siren 2, strobe) 55 mA (internal siren)
	Permitted cable length (2 x 2 x 0.8 mm)	Max. 100 m @ 375 mA

ABB i-bus® KNX

KNX Security Panel, SM

GM/A 8.1, 2CDG110150R0011

Landline/PSTN	Number	1
	Type	Analog
Security Bus (S-Bus 1)	Number	1
	Output voltage	13.2 V DC \pm 0.5 V
	Output current (S-Bus 1)	800 mA
	Short circuit current (S-Bus 1)	1200 mA
	Cable type	J-Y(St)Y 2 x 2 x 0.8 mm EIB-Y(St)Y 2 x 2 x 0.8 mm
	Permitted cable length (2 x 2 x 0.8 mm)	Sum of all strings max. 1000 m
	Current requirement at each cable end:	
	800 mA	50 m
	700 mA	60 m
	600 mA	70 m
	500 mA	80 m
	400 mA	100 m
	300 mA	140 m
200 mA	200 m	
100 mA	400 m	
50 mA	800 m	
Voltage drop	Max. 3 V at the end of the cable	
Security Bus (S-Bus 2) (for future application, does not currently have a function)	Number	1
Security Bus (S-Bus 3)	Number	1
	Output voltage	13.2 V DC \pm 0.5 V
	Output current	300 mA
	Short circuit current	325 mA
	End of line resistor	120 Ohms (contained in the accessories)
	Permitted cable length (2 x 2 x 0.8 mm)	Max. 125 m @ 325 mA
	Number of Keypads of the BT/A series	Max. 5
Network (LAN)	Number	1
	Type	10/100 BaseT, IEEE 802.3
	Connection	RJ-45
	Permitted cable length	Max. 100 m
ATS bus (ABB transmission devices of the comXline series)	Number	1
	Output voltage	13.2 V DC \pm 0.5 V
	Output current	125 mA
	Short circuit current	290 mA
	Permitted cable length (2 x 2 x 0.8 mm)	Max. 125 m @ 290 mA
Input (Off the wall tamper contact)	Number	1
	Type	Microswitch (optionally available as accessories WA/Z 1.1)
Case tamper	Number	1
	Type	Microswitch
SD card reader (for additional language packs)	Number	1
	Type	SD, SDHC (not in scope of delivery)
	Storage capacity	32 GB

ABB i-bus® KNX

KNX Security Panel, SM

GM/A 8.1, 2CDG110150R0011

Connection type	Type	Pluggable screw type terminals
	Connecting capacity	0.2...2.5 mm ² rigid/flexible
	Multi-wire connecting capacity	0,2...1 mm ² single core 0,2...1,5 mm ² stranded
	Tightening torque	Max. 0.6 Nm
Temperature range	Mode	-10°C...+55°C
	Transport	-25°C...+70°C
	Storage	-25°C...+55°C
Environmental conditions	Max. humidity	93%, no condensation
	Atmospheric pressure	Atmosphere up to 2000 m
Design	Dimensions (H x W x D)	466.5 x 427 x 112.5 mm
	Enclosure, color	Sheet steel, RAL 9016 (traffic white)
	Case, color	Plastic, RAL 9005 (jet black), halogen-free
Weight	Enclosure and electronics module	9 kg
Protection type	IP 30	To DIN EN 60 529
Protection class	I	To DIN EN 61 140
Isolation category	Overtoltage category	III to EN 60 664-1
	Pollution degree	2 to DIN EN 60 664-1
Environmental class	II	DIN EN 50 130-5
Interference immunity	DIN EN 50 130-4	
Approvals	KNX	To DIN EN 50 491
	VdS 2252	Class C applied for
	DIN EN 50 131-3	Grade 3
CE conformity	In accordance with the EMC guideline and low voltage guideline, ROHS, telecommunications directive	

ABB i-bus® KNX

KNX Security Panel, SM

GM/A 8.1, 2CDG110150R0011

Device type	Application program	Maximum number of communication objects	Maximum number of group addresses	Maximum number of assignments
GM/A 8.1	Monitor Report Display/ 1.0*	551	600	600

* ... = Current version number of the application. **Please refer the software information on our website for this purpose.**


Note
<p>For a detailed description of the application see “KNX Security Panel GM/A 8.1” product manual. It is available free-of-charge at www.abb.com/knx.</p> <p>ETS and the current version of the device application are required for programming.</p> <p>The current application can be found with the respective software information for download on the Internet at www.abb.com/knx. After import into ETS, it appears in the <i>Catalogs</i> window under <i>Manufacturers/ABB/Security and Surveillance</i>.</p> <p>The device does not support the locking function of a KNX device in ETS. If you use a <i>BCU code</i> to inhibit access to all the project devices, it has no effect on this device. Data can still be read and programmed.</p> <p>The device supports the extended group address range in the ETS.</p> <p>The complete application can be reloaded if required. This operation (update or unloaded application) can take some time.</p>

ABB i-bus® KNX

KNX Security Panel, SM

GM/A 8.1, 2CDG110150R0011

Connection schematic

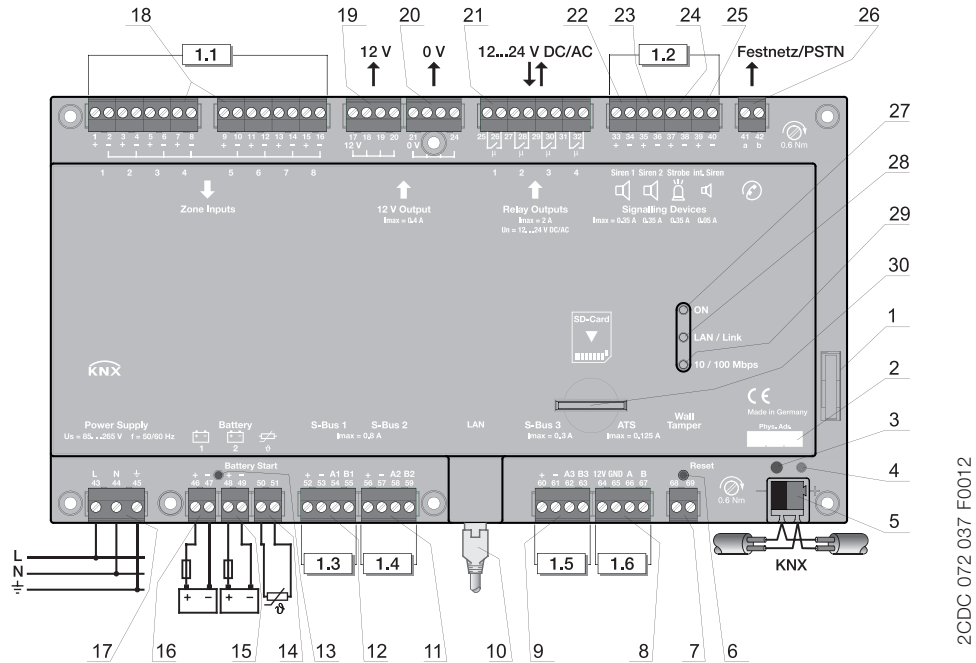


- | | | | |
|----|---|----|--|
| 1 | Case tamper | 16 | Connection of critical power supply (battery 1) |
| 2 | Labeling panel for physical address | 17 | Power supply connection (a separate circuit for the Panel is required) |
| 3 | <i>Programming</i> button | 18 | Inputs, zone 1...8 |
| 4 | <i>Programming</i> LED (red) | 19 | Output 12 V DC |
| 5 | KNX bus connection | 20 | Output 0 V DC |
| 6 | <i>Reset</i> key | 21 | Relay outputs 1...4 |
| 7 | Connection of off the wall tamper contact WA/Z 1.1 | 22 | Output, siren 1 |
| 8 | ATS bus connection to connect an ABB alarm transmission system of the comXline series | 23 | Output, siren 2 |
| 9 | S-Bus 3 bus connection to connect Keypads of the BT/A series | 24 | Output, strobe |
| 10 | LAN network connection | 25 | Output, internal siren |
| 11 | S-Bus 2 connection (currently no function) | 26 | Connection, landline connection/PSTN |
| 12 | S-Bus 1 bus connection to connect system components | 27 | LED <i>Operation</i> (green) |
| 13 | Battery Start key | 28 | LED <i>LAN/Link</i> (yellow) |
| 14 | Connection of temperature sensor (PTC) | 29 | LED <i>10/100 Mbps</i> (yellow) |
| 15 | Connection of critical power supply (battery 2) | 30 | SD card reader |

2CDC 072 037 F0012


ABB i-bus® KNX KNX Security Panel, SM GM/A 8.1, 2CDG110150R0011

Dimension drawing, enclosure cover

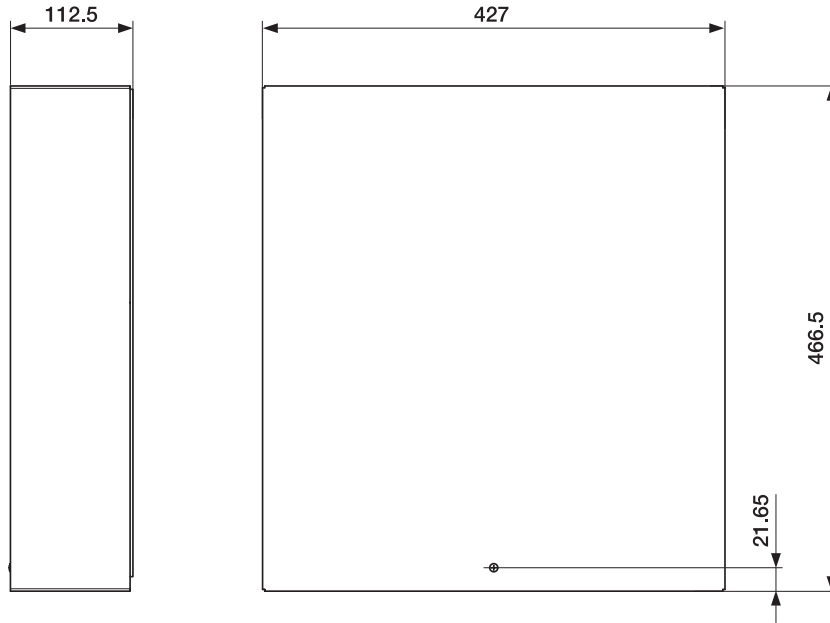

2CDC 072 035 F0012

Dimension drawing, enclosure base

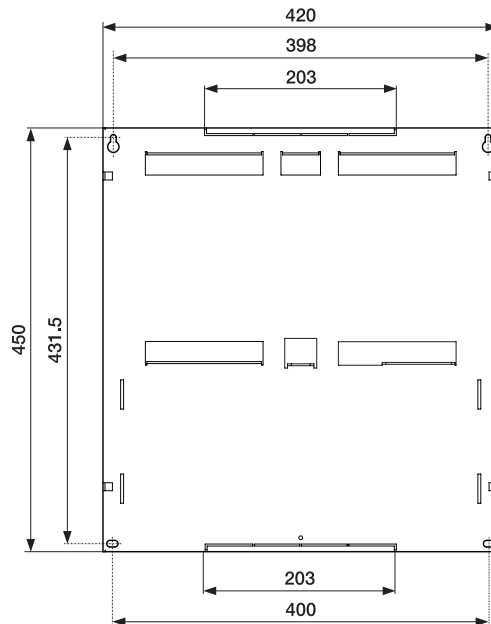

2CDC 072 034 F0012

Contact

ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82

69123 Heidelberg, Germany

Telefon: +49 (0)6221 701 607

Telefax: +49 (0)6221 701 724

E-Mail: knx.marketing@de.abb.com

Further information and local contacts:

www.abb.com/knx

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice.

The agreed properties are definitive for any orders placed. ABB AG shall not be liable for any consequences arising from errors or incomplete information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Reproduction, transfer to third parties or processing of the content – including sections thereof – is not permitted without prior expressed written permission from ABB AG.

Copyright© 2015 ABB

All rights reserved