


Device Peripherals

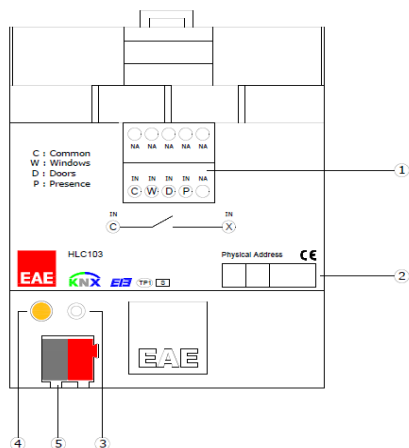

1. Input Diagram
2. Physical address label
3. Programming button
4. Programming LED
5. KNX Power

Description

HLC device enables active/passive lighting, air conditioning, curtain shutters and sockets in the room without using cardholder at guest room entrances. When the guest exits the room, all the desired lighting, wall outlet, curtain shutters and air conditioning system will turn off as defined by the company for energy saving purposes. These scenes can be changed remotely by the company.

- When the guest is not in the room, it guarantees energy saving without using the cardholder (energy saver)
- Various scenes are operated. Pre-Welcome, Welcome, Leave, Check-in/out, etc.
- The hotel room has logic functions are designed specifically for business needs.
- Scenes defined in the room can be changed from the center with GRMS software.
- 3 dry contact inputs can be used as Window, Door and Presence sensor according to related input.

All features can be used separately or together. Please consider that those features will be processed depending on priority. Bus Voltage Fail & Return behavior can be set via ETS configuration.

Technical Data


Type of protection	IP 20	EN 60 529
Safety class	II	EN 61 140
Power Supply	21V... 30V DC, SELV KNX Bus Current consumption < 10mA	
Connections	- Plug-in screw-type terminal - KNX Bus connection terminal	
Output	No Physical Output. Group Object Output only.	
Operating elements	LED (red) and programming button to assign physical address	
Temperature range	Ambient	-5° C +45° C
	Storage	-25° C +55° C
Dimensions	65,5 x 72 x 90 mm Width W in mm 18 mm Width W in units 4 modules	
Weight	0,15 Kg	
Humidity	Maximum air humidity 95 % no moisture condensation	
Box	Plastic, polycarbonate, colour grey	
CE	In accordance with the EMC guideline and low voltage	
Application program	Communication objects	233
	Number of addresses (max)	255
	Number of assignments (max)	255

Operation and Display


-Programming Led⁽³⁾

Red led lights up after the programming button is pressed.

Connection Example

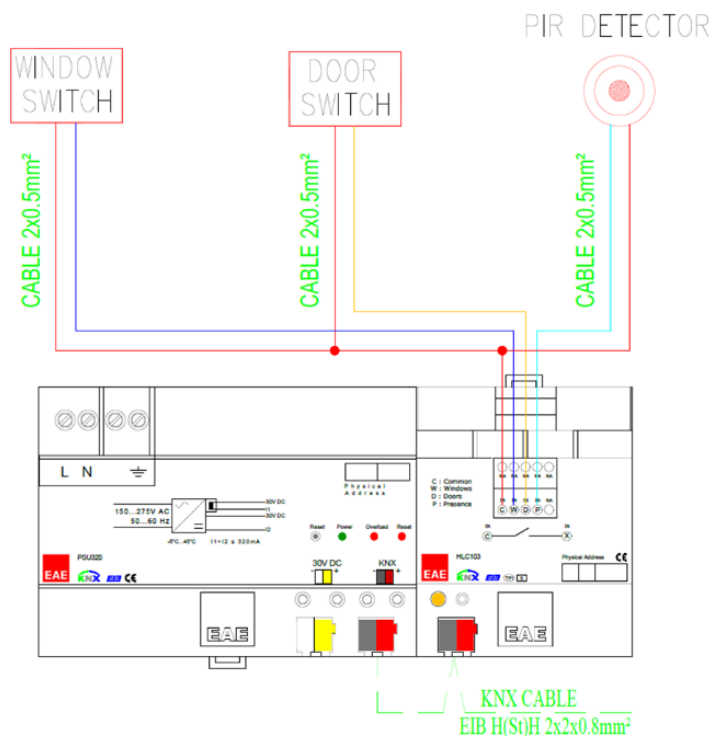

Scale Drawings

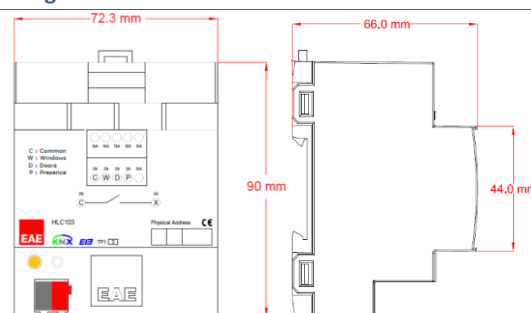

Commissioning

Determination of the physical address and setting of parameters are actualized with Engineering Tool Software (ETS4 or higher). ".knxprod" file must be imported to the ETS. Please check website for latest ".knxprod" file.

www.eaetechnology.com

i A detailed information about parameter configuration can be found in Product Manual of device.

! Installation and commissioning of device may only be implemented by trained electricians. The relevant standards, directives, regulations and instructions must be observed when planning and implementing the electrical installation.

- When connecting the device make sure that the device is isolated!
- Protect the device against moisture, dirt and damage during transport, storage and operation!
- Do not operate the device out of the specified technical data which is stated.
- The device may only be operated in closed enclosures (Distribution boards etc.)

Cleaning

If device becomes dirty, only a dry cloth can be used for cleaning. It is not suitable to use wet cloths, caustics and solvents.