ABB i-bus® EIB / KNX

Binary Input Module, 4-fold, 115/230 V BE/M 4.230.1, 2CDG 110 005 R0011



The 4-fold binary input module is operated in any slot in the Room-Controller Basis Device. It has four inputs for reading 115 V or. 230 V contacts, such as conventional switches and buttons. The device provides the signal voltage (input voltage to the Room-Controller).

The internal supply is carried out via the Room Controller Basis Device. Contact is established automatically when the module is snapped in place.

Technical Data


Power supply:	- Internal supply	via the Room Controller Base Unit, contact made via contact system on base of module	
Inputs:	- Number	4	
	- Signal level	0 40 V AC / DC for 0-signal 90 264 V AC / DC for 1-signal	
	 Input current 	max. 2 mA	
Connections:	- Signal cables (inputs)	2 x 4-pole screw terminals with plug-in connection	
	 Max. cable length 	100 m	
	– Wire ranges	0.22.5 mm2 finely stranded 0.24.0 mm2 single-core	
Ambient temperature range:	Storage	− 25 °C 55 °C	
	Transport	− 25 °C 70 °C	
Design:	Type of installation	For snapping into the Room Controller Base Unit	
	 Housing, colour 	Plastic housing, anthracite, halogen-free	
	Housing dimensions (W x H x D)	49 x 42 x 93	
	- Weight	0.06 kg	
CE norm:	 in accordance with the EMC guideline and low voltage guideline 		

Application program	Number of communication objects	Max. number of group addresses	Max. number of associations
Room Controller modular, 8f/1	246	254	255

ABB i-bus® EIB / KNX

Binary Input Module, 4-fold, 115/230 V BE/M 4.230.1, 2CDG 110 005 R0011

Circuit diagram

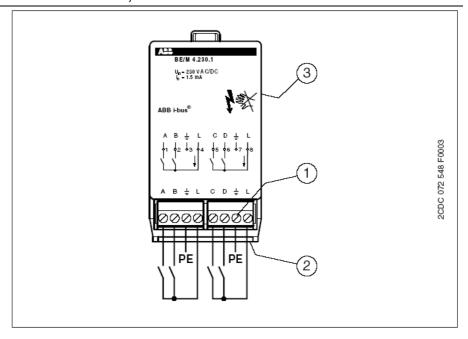

- 1 Inputs (plug in screw terminals)
- 2 Power inputs (mating surface)

3 Control lines (underside of the device)

The programming is carried out with ETS from version ETS2 V1.2a or higher.

For programming the device with the help of the ETS3, the relevant VD3 file must be applied.

Detailed information about the installation, programming and application can be found in the product manual for the Binary Input Modules BE/M.

This manual can be downloaded under <u>www.abb.de/eib</u>

Note