



■ Features

- 8 channel actuator in a compact size
- Suitable for various and mixed applications
- For AX, C-load, capacitive & inductive of loads
- Program via ETS5.0 software
- Manual control via Push button
- Programmable various time and scene function
- 3 years warranty


■ Applications

- Building Automation
- Lighting switch
- Shutter/Blind control(Planned)
- Heating control
- Ventilation function

■ Description

The KNX actuator is a 8 channel device with high quality independent latching relay for switch, shutter or any possible mixed applications. The compact design with 4 units (72 mm) wide modular makes it suitable for installation in the distribution board on 35 mm mounting rails in the EIB / KNX application. The connection to the KNX bus is implemented via a bus connection terminal. The switching relays are particularly suitable for switching ohmic loads, capacitive loads, for instance LED drivers and inductive loads as well as motors in shutter or blind applications. The actuator are powered via the EIB / KNX and do not require any additional power supply.

■ Model Encoding

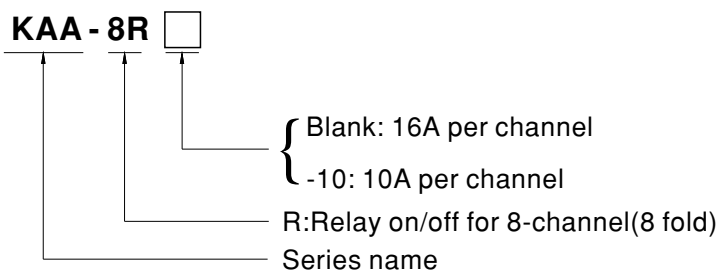


| Type | Function | Note |
|-------|-------------------------------------|----------|
| Blank | 8 channel actuator, 16A per channel | In stock |
| -10 | 8 channel actuator, 10A per channel | In stock |

SPECIFICATION

| MODEL | | KAA-8R | KAA-8R-10 | |
|------------------------------------|--|---|--------------------------------|-------------------------|
| SUPPLY | KNX BUS VOLTAGE | 21~31V | | |
| | CURRENT CONSUMPTION | <6mA | | |
| | POWER CONSUMPTION | <180mW | | |
| | Nr. OF SWITCHING OUTPUT | 8 | | |
| | Nr. OF SHUTTER OUTPUT | 4(Planned) | | |
| | OUTPUT TYPE | Independent, potential-free bistable(latching) relay | | |
| OUTPUT SWITCHING RATINGS | VOLTAGE | 230VAC@50Hz | | |
| | CURRENT | OHMIC LOAD | 16A | 10A |
| | | CAPACITIVE LOAD | 220 μ F(See Note.2) | 220 μ F(See Note.2) |
| | MAX. INRUSH CURRENT | 800A(max. 200 μ s),165A(max. 20ms) | | |
| | EN60947-4-1 AC1(COS θ =0.8) | 16A | 10A | |
| | EN60947-4-1 AC3(COS θ =0.45) | 8A | 5A | |
| | EN60947-4-1 AC5a(COS θ =0.45) | 8A | 8A | |
| | EN60947-4-1 AC5b | 16A | 10A | |
| MAX. TOTAL CURRENT OF THE ACTUATOR | 80A | 56A | | |
| OUTPUT SERVICE LIFE | MECHANICAL SERVICE LIFE | >10 ⁶ | | |
| | ELECTRICAL ENDURANCE EN60669-1 19.1 | 10 ⁴ (See Note.2) | 4*10 ⁴ (See Note.2) | |
| | EN60669-1 19.2 , FLOURSCENT LAMP(AX) | 10 ⁴ (See Note.2) | 10 ⁴ (See Note.2) | |
| OPERATING & DISPLAY | PROGRAMMING BUTTON/LED | Program the individual address | | |
| | MANUAL BUTTON/LED | Manual control and indication | | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +45°C (3K5) | | |
| | STORAGE TEMP. | -35 ~ +70°C | | |
| | WORKING HUMIDITY | 10 ~ 95% RH non-condensing | | |
| | PROTECTION CLASS | II , According to EN61140 | | |
| | OVER VOLTAGE CATEGORY | III , According to EN60664-1 | | |
| | POLLUTION DEGREE | 2, According to EN60664-1 | | |
| | DEGREE OF PROTECTION | IP20,According to EN60529 | | |
| SAFETY & EMC | SAFETY STANDARDS | EN50491-3, EN60669-1, EN60669-2-1, EN60669-2-5(See Note.2) | | |
| | EMC EMISSION | Compliance to EN50491-5-1,-2,-3, EN50090-2-2, EN60669-2-1, EN60669-2-5, EN63044-5-1,-2,-3(See Note.2) | | |
| | EMC IMMUNITY | Compliance to EN50491-5-1,-2,-3, EN50090-2-2, EN60669-2-1, EN60669-2-5, EN63044-5-1,-2,-3(See Note.2) | | |
| CONNECTIONS | SCREW TERMINAL | 0.5 – 4.0mm ² solid core 0,5 - 2,5mm ² finely stranded | | |
| | KNX BUS CONNECTION TERMINAL | 0.8mm ϕ , solid core | | |
| OTHERS | DIMENSION | 72*90*57mm (W*H*D) | | |
| | MOUNTING WIDTH IN UNITS | 4 | | |
| | DIN RAIL MOUNTING | 35mm mounting rail according to DIN EN60715 | | |
| | PACKING | 0.312Kg ; 48pcs/16Kg/1.02CUFT | | |
| NOTE | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Notified Body test report is provided. | | | |




■ Block Diagram

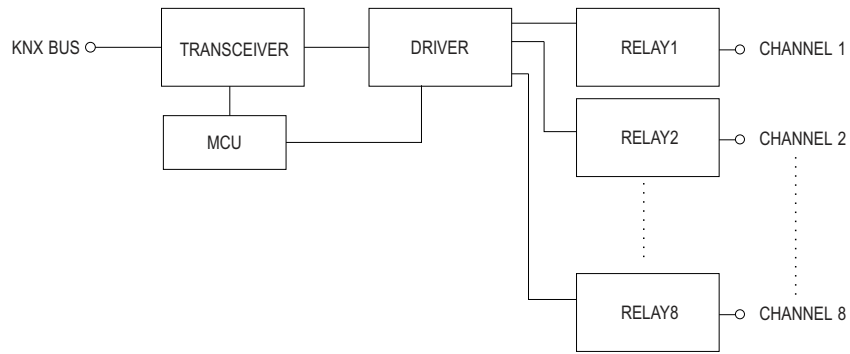

■ Mechanical Specification

Case No. KAA

Unit:mm

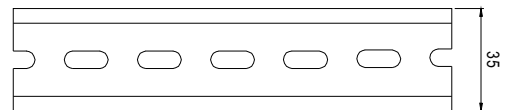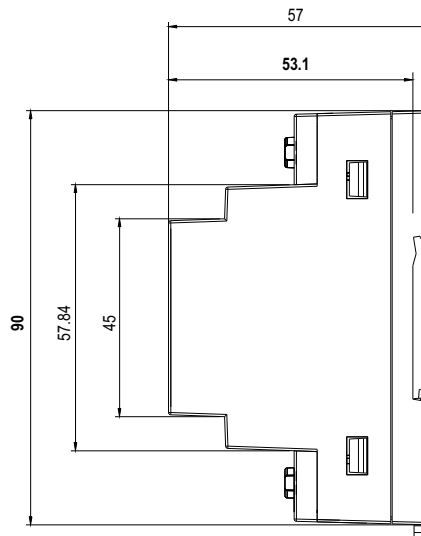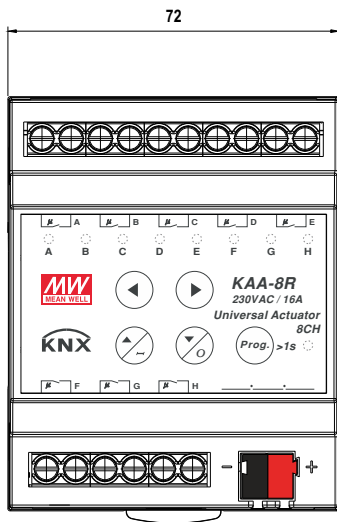

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

■ Max. output load per channel

| Maximum load | KA A-8R | KA A-8R-10 |
|--|----------------------|----------------------|
| Resistive load or heater | 3680W | 2300W |
| LED driver | refer to table below | refer to table below |
| Incandescent lamps | 2300W | 2300W |
| Halogen lamps 230V | 2300W | 2300W |
| Halogen lamps, electronic transformer | 1300W | 1300W |
| Fluorescent lamps, not compensated | 2000W | 2000W |
| Fluorescent lamps, parallel comp. | 1200W | 1200W |
| Max. number of electronic transformers | 15 | 15 |
| Shutter motor | 600W | 600W |

■ Nr. of driver per channel

| The maximum number of the MEANWELL LED driver that can be connected to each channel at 230V is shown as below | | |
|---|---------|------------|
| Suggested model | KA A-8R | KA A-8R-10 |
| APC-8 | 22 | 22 |
| APC-12 | 11 | 11 |
| APC-16 | 18 | 18 |
| APC-25 | 11 | 11 |
| APC-35 | 11 | 11 |
| APC-8E | 22 | 22 |
| APC-12E | 18 | 18 |
| APC-16E | 15 | 15 |
| APV-8 | 22 | 22 |
| APV-12 | 11 | 11 |
| APV-16 | 18 | 18 |
| APV-25 | 11 | 11 |
| APV-35 | 11 | 11 |
| APV-8E | 22 | 22 |
| APV-12E | 18 | 18 |
| APV-16E | 15 | 15 |
| LCM-25 | 25 | 25 |
| LCM-40 | 25 | 25 |
| LCM-60 | 25 | 25 |
| LCM-25DA | 25 | 25 |
| LCM-40DA | 25 | 25 |
| LCM-60DA | 25 | 25 |
| LPC-20 | 11 | 11 |
| LPC-35 | 9 | 9 |
| LPC-60 | 8 | 8 |
| LPC-100 | 7 | 7 |
| LPC-150 | 13 | 5 |



| The maximum number of the MEANWELL LED driver that can be connected to each channel at 230V is shown as below | | |
|---|--------|-----------|
| Suggested model | KAA-8R | KAA-8R-10 |
| LPF-16 | 18 | 18 |
| LPF-25 | 16 | 16 |
| LPF-40 | 16 | 16 |
| LPF-60 | 9 | 9 |
| LPF-90 | 7 | 7 |
| LPF-16D | 18 | 18 |
| LPF-25D | 16 | 16 |
| LPF-40D | 16 | 16 |
| LPF-60D | 9 | 9 |
| LPF-90D | 7 | 7 |
| LPH-18 | 16 | 16 |
| LPHC-18 | 16 | 16 |
| LPV-20 | 11 | 11 |
| LPV-35 | 9 | 9 |
| LPV-60 | 8 | 8 |
| LPV-100 | 7 | 7 |
| LPV-150 | 8 | 8 |
| NPF-40 | 10 | 10 |
| NPF-60 | 10 | 10 |
| NPF-90 | 8 | 8 |
| NPF-120 | 8 | 8 |
| NPF-40D | 10 | 10 |
| NPF-60D | 10 | 10 |
| NPF-90D | 8 | 8 |
| NPF-120D | 8 | 8 |
| PCD-16B | 80 | 80 |
| PCD-25B | 53 | 53 |
| PCD-40B | 45 | 45 |
| PCD-60B | 26 | 26 |
| PLC-30 | 23 | 23 |
| PLC-45 | 23 | 23 |
| PLC-60 | 23 | 23 |
| PLC-100 | 13 | 13 |
| PLD-16B | 40 | 40 |
| PLD-25 | 32 | 32 |
| PLD-40B | 32 | 32 |
| PLD-60B | 32 | 32 |
| PLM-12 | 53 | 53 |
| PLM-25 | 53 | 53 |
| PLM-40 | 53 | 53 |
| PLN-20 | 23 | 23 |
| PLN-30 | 23 | 23 |
| PLN-45 | 23 | 23 |
| PLN-60 | 23 | 23 |
| PLN-100 | 13 | 13 |
| PLP-30 | 32 | 32 |
| PLP-45 | 27 | 27 |
| PLP-60 | 23 | 23 |
| PWM-40 | 10 | 10 |
| PWM-60 | 10 | 10 |
| PWM-90 | 8 | 8 |
| PWM-120 | 8 | 8 |




| The maximum number of the MEANWELL LED driver that can be connected to each channel at 230V is shown as below | | |
|---|--------|-----------|
| Suggested model | KAA-8R | KAA-8R-10 |
| HLN-40H | 10 | 10 |
| HLN-60H | 9 | 9 |
| HLN-80H | 7 | 7 |
| HLP-40H | 7 | 7 |
| HLP-60H | 9 | 9 |
| HLP-80H | 7 | 7 |
| CEN-60 | 22 | 22 |
| CEN-75 | 22 | 22 |
| CEN-100 | 22 | 22 |
| CLG-60 | 23 | 23 |
| CLG-100 | 13 | 13 |
| CLG-150 | 8 | 8 |
| ELG-75 | 10 | 10 |
| ELG-100 | 8 | 8 |
| ELG-150 | 8 | 8 |
| ELG-75-C | 10 | 10 |
| ELG-100-C | 13 | 13 |
| ELG-150-C | 8 | 8 |
| HBG-100 | 8 | 8 |
| HBG-160 | 8 | 8 |
| HBG-240 | 7 | 7 |
| HBG-60 | 18 | 18 |
| HLG-40H | 16 | 16 |
| HLG-60H | 9 | 9 |
| HLG-80H | 7 | 7 |
| HLG-100H | 8 | 8 |
| HLG-120H | 8 | 8 |
| HLG-150H | 8 | 8 |
| HLG-185H | 8 | 8 |
| HLG-240H | 7 | 5 |
| HLG-320H | 7 | 6 |
| HLG-600H | 4 | 3 |
| HLG-60H-C | 8 | 8 |
| HLG-80H-C | 8 | 8 |
| HLG-120H-C | 10 | 10 |
| HLG-185H-C | 9 | 9 |
| HLG-240H-C | 7 | 7 |
| HLG-320H-C | 7 | 6 |
| HSG-70 | 9 | 9 |
| HVG-65 | 20 | 20 |
| HVG-100 | 8 | 8 |
| HVG-150 | 8 | 8 |
| HVG-240 | 5 | 5 |
| HVG-320 | 4 | 4 |
| HVGC-65 | 20 | 20 |
| HVGC-100 | 8 | 8 |
| HVGC-150 | 8 | 8 |
| HVGC-240 | 5 | 5 |
| HVGC-320 | 4 | 4 |

■ Configuration and Commissioning


The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>

■ Typical application

⊙ Application 1: Work with non-dimmable driver

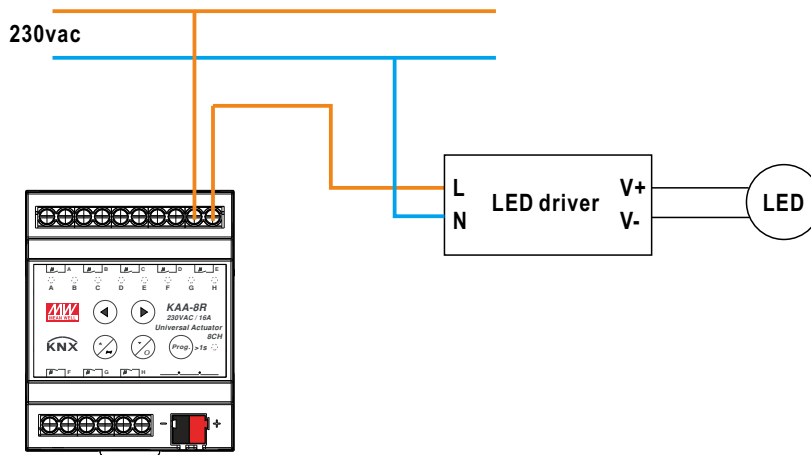

⊙ Application 2: Work with Heater

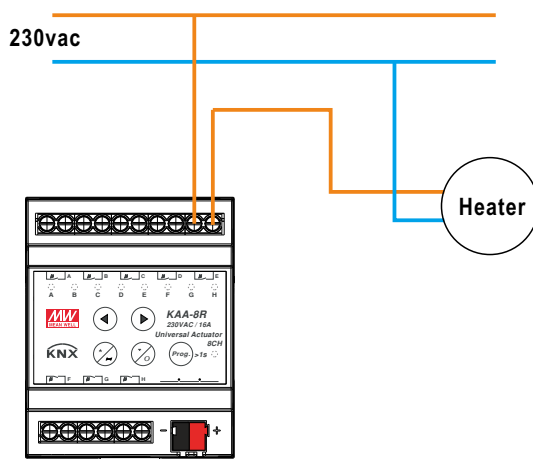

■ Recommended Screwdriver, Wire and Torque Setting

1. Screwdriver(Width*Thick): Slotted screwdriver 2.5*0.4~3.5*0.6
2. Wire: 0.5~4.0mm² solid core or 0.5~2.5mm² finely stranded
3. Torque: 0.8Nm

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>