

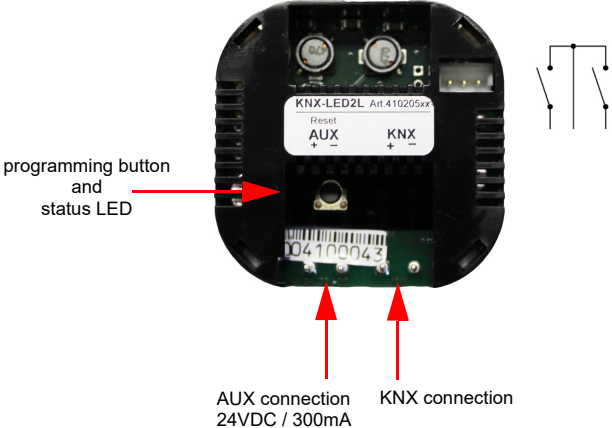


**KNX-LED2L-ARx-H**

**Article no. 4102054x**

<p>The KNX-LED2L is a luminaire for mounting in a 60/68mm flush-mounted box</p> <ul style="list-style-type: none"> <li>• All functions are programmed and parameterized with the ETS</li> <li>• up to 700lm / 7W illuminance</li> <li>• dimmable</li> <li>• Color temperature of the dual white LED adjustable</li> <li>• Leading control up to 10 base points e.g. Data type: 2-byte float lux level, CO2, temperature, humidity, ph level etc.</li> <li>• Stairway functionality, buildin timer</li> <li>• 2 binary contacts</li> </ul>	 <p><b>Application: LEDx_v11.knxproj</b></p>
---	--

	 <p>programming button and status LED</p> <p>AUX connection 24VDC / 300mA</p> <p>KNX connection</p>
--	--

**Technical Data**

color temperature	adjustable
warm white	2700 K
cold white	5000 K
luminous flux	700 lm / dimmable
power	7 W
operating voltage KNX	bus voltage 21 .. 32 VDC
power consumption KNX	approx. 240 mW ( at 24 VDC )
auxiliary voltage	24 .. 32 VDC / approx. 300 mA
ambient temperature	operating: 0 .. +50°C storage: 0 .. +80°C
ambient humidity	0 .. 95% r.H noncondensing
front	aluminum frame Ø 84 mm height half bulb 33 mm
plastic housing	50 x 50 mm , depth 32 mm
protection class	IP20