

Motion detector HF 360°, 230 V, 10 m,

351-27360

4 year warranty

The HF motion detector with one channel is suitable for switching indoor lighting on and off. You can always activate the light with a NO push button (230 V AC) (to be ordered separately). The detector is equipped with an integrated light sensor.


- Separate setting for the lux, the switch-off delay and the sensitivity
- 360° detection for ceiling mounting, 160° for wall mounting

Motion detector for use in light fittings, etc.

- Use of HF technology for optimal detection.
- Can easily be integrated into different devices or walls thanks to its HF detection.



Detection range

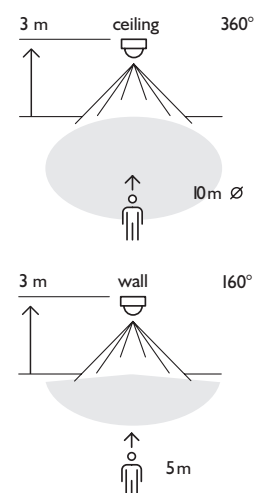

ceiling	
2 m	10 m
3 m	10 m
4 m	10 m
5 m	10 m

wall	
2 m	5 m
3 m	5 m
4 m	5 m
5 m	5 m



230 V

stand-alone

360°

2 – 4 m

niko


Technical data

Article number	351-27360
Configuration	stand-alone
Input voltage	230 Vac \pm 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Relay contact	4.35 A
Maximum load incandescent and halogen lamps ($\cos\phi=1$)	1000 W
Maximum load economy lamps (CFLi)	100 W
Maximum load LED lamps 230 V	100 W
Light intensity range	5 lux – 2000 lux
Number of channels	1 channel
Switch-off delay	10 s – 5 min
Detection angle	360 °
Detection range (HF)	max. 10m for ceiling mounting, max. 5m for wall mounting
Ambient temperature	-20 – +70 °C
Mounting height	2 – 4 m
Dimensions (HxWxD)	90 x 52 x 35 mm
Protection degree	IP20
Marking	CE

Accessories

351-27361	Metal shield bracket
-----------	----------------------

Dimensions

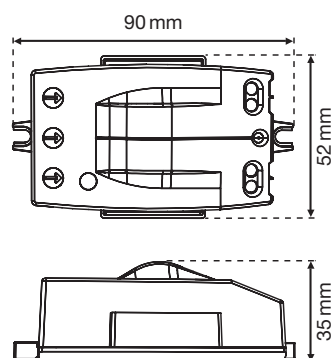

Wiring diagram

