

ABB i-bus® KNX

Weather Station, 4-fold, MDRC

WS/S 4.1.1.2, 2CDG110191R0011



Product description

The device is used to record weather data. Four conventional sensors can be connected to the device. The connection to the bus is established via the bus connection terminal on the front of the device.

The device is ready for operation after connecting the bus voltage. Additional auxiliary voltage is required. The device is parameterized and programmed using ETS.

ABB i-bus® KNX

Weather Station, 4-fold, MDRC

WS/S 4.1.1.2, 2CDG110191R0011

Technical data


Supply	Bus voltage	21...32 V DC	
	Current consumption, bus	< 10 mA	
	Mains voltage U_s	85...265 V AC, 110...240 V DC, 50/60 Hz	
	Power consumption	Max. 11 W at 230 V AC	
	Power consumption, mains	80/40 mA at 115/230 V AC	
	Leakage loss, device	Max. 3 W at 230 V AC	
Auxiliary voltage supply for the sensors	Rated voltage U_n	24 V DC	
	Rated current I_n	300 mA	
Connections	KNX	Via bus connection terminal, screwless	
	Mains voltage	Via screw terminals	
	Sensor supply	Via screw terminals	
	Sensor inputs	Via screw terminals	
	Screw terminals		0.2...2.5 mm ² fine stranded
			0.2...4.0 mm ² single core
	Tightening torque	Max. 0.6 Nm	
Cable length	Between sensor and device input	Max. 100 m	
Operating and display elements	Programming button/LED 	For assignment of the physical address	
Protection	IP 20	To DIN EN 60 529	
Protection class	II	To DIN EN 61 140	
Isolation category	Overvoltage category	III to EN 60 664-1	
	Pollution degree	II to DIN EN 60 664-1	
KNX safety voltage	SELV 24 VDC		
Temperature range	Mode	-5 °C...+45 °C	
	Storage	-25 °C...+55 °C	
	Transport	-25 °C...+70 °C	
Ambient conditions	Maximum air humidity	93 %, no condensation allowed	
Design	Modular installation device (MDRC)	Modular installation device, ProM	
	Dimensions	90 x 72 x 64.5 mm (H x W x D)	
	Mounting width in space units	4 x 18 mm modules	
	Mounting depth	64.5 mm	
Mounting	On 35 mm mounting rail	To DIN EN 60 715	
Installation position	Any		
Weight	0.270 kg		
Housing/color	Plastic housing, gray		
Approvals	KNX to EN 50 090-1, -2	Certification	
CE mark	In accordance with the EMC directive and low voltage directive		

ABB i-bus® KNX

Weather Station, 4-fold, MDRC

WS/S 4.1.1.2, 2CDG110191R0011

Inputs

Rated values	Number	4	
	Voltage	0...1 V, 0...5 V, 0...10 V, 1...10 V	
	Maximum upper limit	12 V	
	Current	0...20 mA, 4...20 mA	
	Maximum upper limit	25 mA	
	Resistance		0...1,000 ohms
			PT100 2-conductor technology
			PT100 3-conductor technology
			PT1000 2-conductor technology
			PT1000 3-conductor technology
		Choice of KT/KTY 1,000/2,000, user-defined	
	Contact	Floating	
	Input resistance for voltage measurement	> 50 Mohms	
	Input resistance for current measurement	260 ohms	
Permitted cable length between sensor and device input	Max. 100 m		

Device type	Application	Max. number of communication objects	Max. number of group addresses	Max. number of assignments
WS/S 4.1.1.2	Weather Data 4f/...*	50	100	100

* ... = Current version number of the application. **Please refer to the software information on our website for this purpose.**

Note

For a detailed description of the application see "Weather Station WS/S 4.1.1.2" product manual. It is available free-of-charge at www.abb.com/knx.

ETS and the current version of the device application are required for programming.

The current version of the application is available on the Internet for download at www.abb.com/knx. After import into ETS, it appears in the *Catalogs* window under *Manufacturers/ABB/Input/Weather Data 4f*.

The device does not support the locking function of a KNX device in ETS. If you use a *BCU code* to inhibit access to all the project devices, it has no effect on this device. Data can still be read and programmed.

ABB i-bus® KNX

Weather Station, 4-fold, MDRC

WS/S 4.1.1.2, 2CDG110191R0011

Resolution and accuracy and tolerances

Please note that the tolerances of the sensors which are used will need to be added to the listed values.

With sensors based on resistance measurement, it is also necessary to consider the feeder cable errors.

In the supplied state of the device, the stated accuracies will not be initially achieved. After initial commissioning, the device performs an autonomous calibration of the analogue measurement circuit. This calibration takes about an hour and is performed in the background. It is undertaken regardless of whether or not the device is parameterized and is independent of the connected sensors. The normal function of the device is not affected. After calibration has been completed, the calibration values which have been determined will be stored in the non-volatile memory. Thereafter, the device will achieve this level of accuracy every time it is switched on. If the calibration is interrupted by programming or bus failure, it will recommence every time it is restarted. The ongoing calibration is displayed in the Status byte by a 1 in bit 4.

Important

The Weather Station has a $U_n = 24$ V DC output voltage to power the sensors.
Make sure that the maximum output current is not exceeded.

ABB i-bus® KNX

Weather Station, 4-fold, MDRC

WS/S 4.1.1.2, 2CDG110191R0011

Voltage signals

Sensor signal	Resolution	Accuracy at 25 °C T _u *1	Accuracy at -5...+45 °C T _u *1	Accuracy at -20...+70 °C T _u *1	Remark
0...1 V	200 µV	±0.2 % ±1 mV	±0.5 % ±1 mV	±0.8 % ±1 mV	
0...5 V	200 µV	±0.2 % ±1 mV	±0.5 % ±1 mV	±0.8 % ±1 mV	
0...10 V	200 µV	±0.2 % ±1 mV	±0.5 % ±1 mV	±0.8 % ±1 mV	
1...10 V	200 µV	±0.2 % ±1 mV	±0.5 % ±1 mV	±0.8 % ±1 mV	

*1 of current measured value at ambient temperature (T_u)

Current signals

Sensor signal	Resolution	Accuracy at 25 °C T _u *2	Accuracy at -5...+45 °C T _u *2	Accuracy at -20...+70 °C T _u *2	Remark
0...20 mA	2 µA	±0.2 % ±4 µA	±0.5 % ±4 µA	±0.8 % ±4 µA	
4...20 mA	2 µA	±0.2 % ±4 µA	±0.5 % ±4 µA	±0.8 % ±4 µA	

*2 of current measured value at ambient temperature (T_u)

Resistance signals

Sensor signal	Resolution	Accuracy at 25 °C T _u *3	Accuracy at -5...+45 °C T _u *3	Accuracy at -20...+70 °C T _u *3	Remark
0...1,000 Ohm	0.1 ohm	±1.0 ohm	±1.5 ohms	±2 ohms	
PT100*4	0.01 ohm	±0.15 ohm	±0.2 ohm	±0.25 ohm	0.1 ohm = 0.25 °C
PT1000*4	0.1 ohm	±1.5 ohms	±2.0 ohms	±2.5 ohms	1 ohm = 0.25 °C
KT/KTY 1000*4	1 ohm	±2.5 ohms	±3.0 ohms	±3.5 ohms	1 ohm = 0.125 °C/at 25 °C
KT/KTY 2.00*4	1 ohm	±5 ohms	±6.0 ohms	±7.0 ohms	1 ohm = 0.064 °C/at 25 °C

*3 in addition to current measured value at ambient temperature(T_u)

*4 plus feeder cable and sensor faults

ABB i-bus® KNX

Weather Station, 4-fold, MDRC

WS/S 4.1.1.2, 2CDG110191R0011

PT100

The PT100 is precise and exchangeable but subject to faults in the feeder cables (cable resistance and heating of the feeder cables). A terminal resistance of just 200 milliohm causes a temperature error of 0.5 °C.

PT1000

The PT1000 responds just like the PT100, but the influences of feeder cable errors are lower by a factor of 10. Use of this sensor is preferred.

KT/KTY

The KT/KTY has a low level of accuracy, can only be exchanged under certain circumstances and can only be used for very simple applications.

Please note that there are different tolerance classes for the sensors in the versions PT100 and PT1000.

The table indicates the individual classes:


Description	Tolerance
DIN class A	$0.15 + (0.002 \times t)$
1/3 DIN class B	$0.10 + (0.005 \times t)$
1/2 DIN class B	$0.15 + (0.005 \times t)$
DIN class B	$0.30 + (0.005 \times t)$
2 DIN class B	$0.60 + (0.005 \times t)$
5 DIN class B	$1.50 + (0.005 \times t)$

t = Current temperature

ABB i-bus® KNX Weather Station, 4-fold, MDRC WS/S 4.1.1.2, 2CDG110191R0011


Connection schematics

Connecting sensor with an external supply

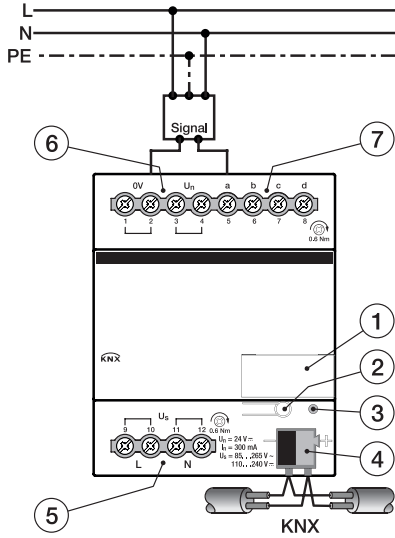


2CDC072034F0013

Connecting a floating contact

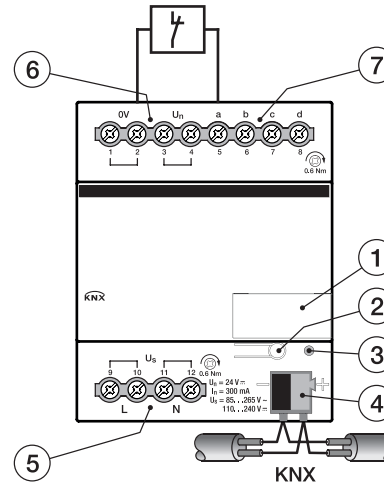


2CDC072037F0013

Connecting a 3-conductor sensor with its own power supply

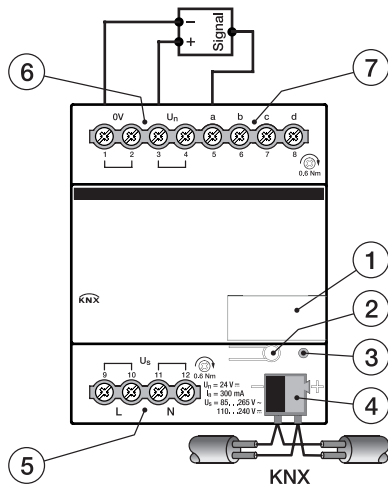

2CDC072036F0013


Connecting a 4-conductor sensor with its own power supply

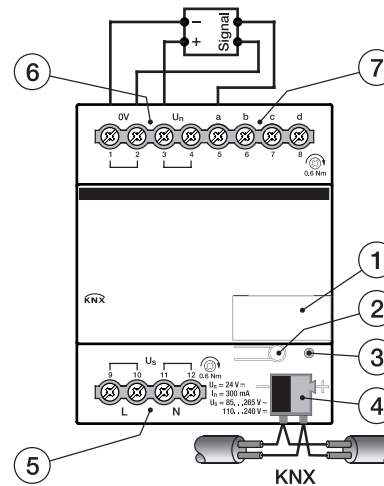

2CDC072035F0013


ABB i-bus® KNX Weather Station, 4-fold, MDRC WS/S 4.1.1.2, 2CDG110191R0011

Connecting a 4...20 mA sensor

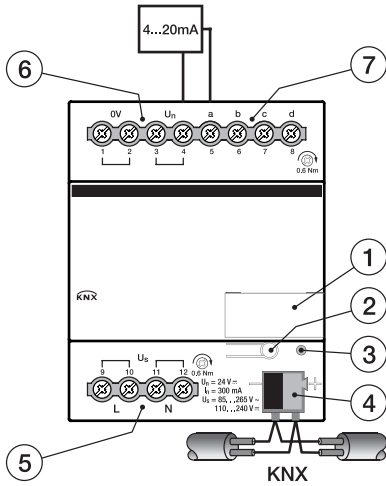

2CDC072031F0014

Connecting a PT100/PT1000 3-conductor temperature sensor

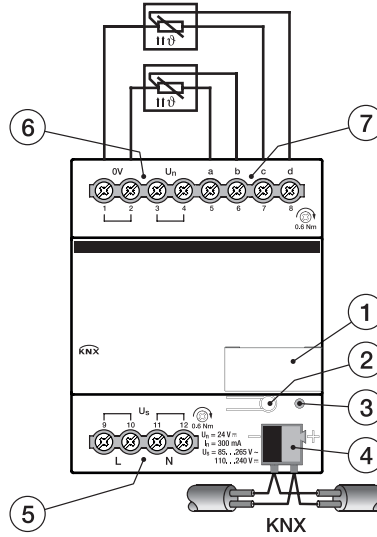

2CDC072032F0014



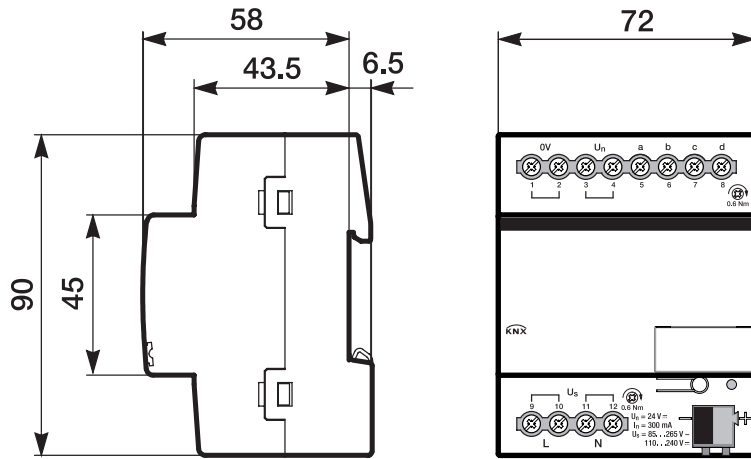
- 1 Label carrier
- 2 Programming button 
- 3 Programming LED  (red)
- 4 Bus connection terminal
- 5 Power supply
- 6 Auxiliary voltage output for sensor supply
- 7 Sensor input

ABB i-bus® KNX Weather Station, 4-fold, MDRC WS/S 4.1.1.2, 2CDG110191R0011

Dimension drawing



2CDC072039F0013

Contact

ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82

69123 Heidelberg, Germany

Telefon: +49 (0)6221 701 607

Telefax: +49 (0)6221 701 724

E-Mail: knx.marketing@de.abb.com

Further information and local contacts:

www.abb.com/knx

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice.

The agreed properties are definitive for any orders placed. ABB AG shall not be liable for any consequences arising from errors or incomplete information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Reproduction, transfer to third parties or processing of the content – including sections thereof – is not permitted without prior expressed written permission from ABB AG.

Copyright© 2015 ABB

All rights reserved