
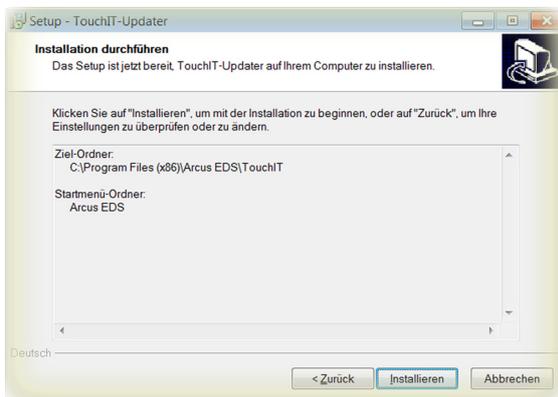
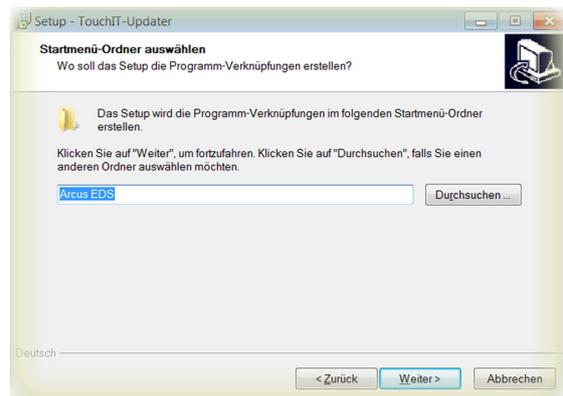
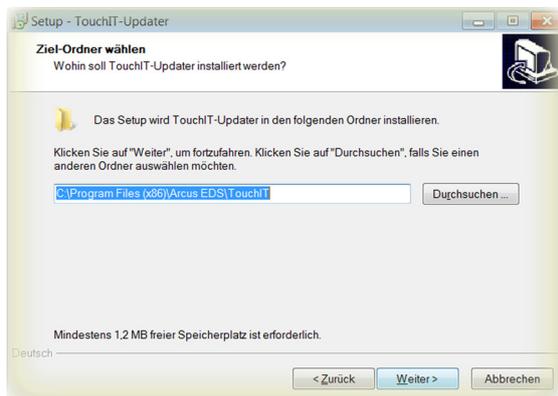


7 Update Tool


The following section describes the different functionality of the Touch_IT Updater.
The Tool contains several functions e.g.:
Firmware update, Upload Screensavers, User Icons, , Logic files, etc.

7.1 Software Installation



When finishing the installation, a folder containing the 32-Bit and the 64-Bit Touch_IT drivers will be created.


7.2 Driver Installation

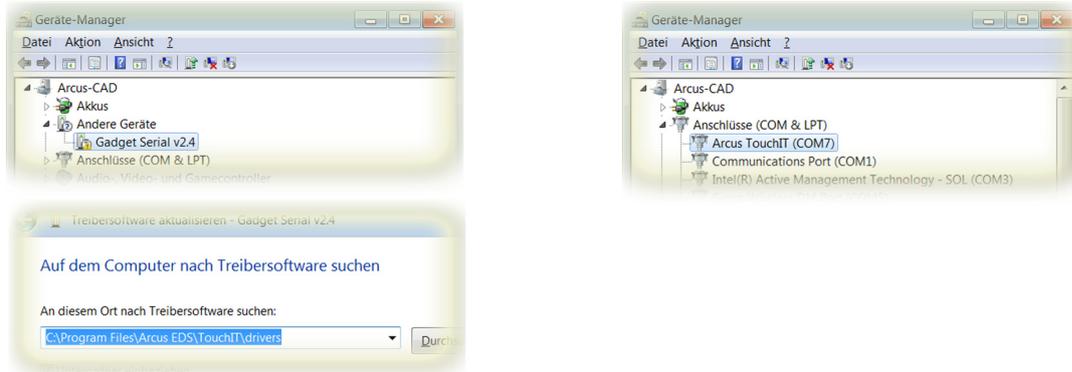

The drivers are located in the folder **drivers** of the installation path.
When the installation of the drivers is finished, an additional serial interface will be registered in the Device Manager.
In this example, the serial interface **COM7** was assigned to the Touch_IT.

7.3 Service Tool

The update tool is located in the folder **Arcus-EDS** of the start menu and can be started by operating **Run Touch_IT-Updater**.

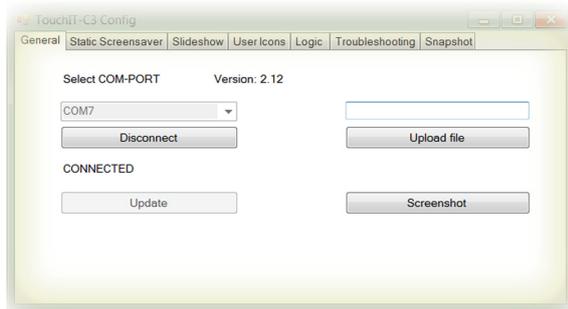

General

Select COM-PORT

must be set to the port that was assigned to the Arcus-EDS Touch_IT by the system. (See also Control Panel / System / Device Manager - connections) (here: COM7)

Update

It will be updated all system components.

Update File

makes it possible to directly transfer files to any desired storage position of the Touch_IT.

Screenshot

saves the current display of the Touch_IT as an image file on your computer.



Static Screensaver

Upload Screensaver

can be used to upload an image that is to be used as static screensaver.

Remove Screensaver

deletes the current static screen saver

supported formats:

PNG | BMP | JPG

The resolution of the display is 320x240 pixels.



Slideshow

Upload Images

can be used to upload slideshow images that are to be used in the screensaver.

Remove Slideshow Images

can be used to upload slideshow images that are to be u

supported formats:

PNG | BMP | JPG | GIF

The resolution of the display is 320x240 pixels.



User Icons


Upload Icons

can be used to upload custom symbols and icons that are to be used as operating elements.

Remove Icons

deletes custom symbols and icons

The specification of the size and the assignment of names will be explained in chapter 8, **Custom Properties**.

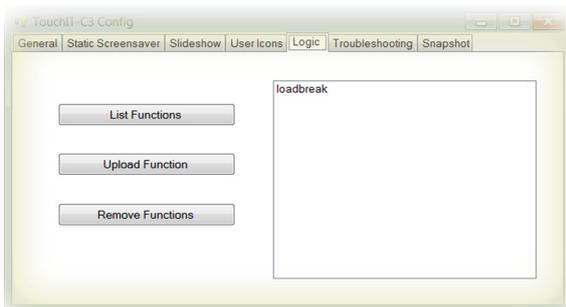

Logic

List Functions

lists all logical functions

Upload Function

serves to upload logical functions

Remove Funktion

deletes selected logical functions


More information on logic can be found in chapter 6, **Logic**.



Troubleshooting

Download and Mail Information

If downloading via ETS is not possible or other malfunctions occur, all settings and parameters of the Touch_IT can be downloaded using the Troubleshooting tab. The file can be sent to Arcus-EDS GmbH via email (service@arcus-eds.de) for error analysis.

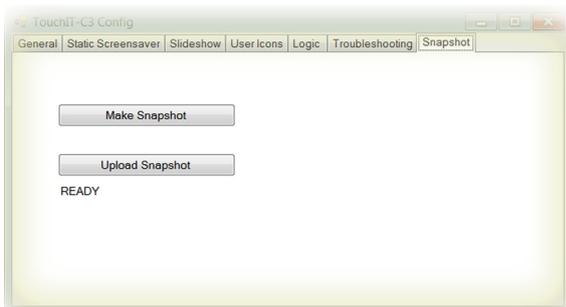

Troubleshooting

Make Snapshot

creates an exact copy of the configuration of a Touch_IT.

The snapshot includes:

- all predefined system settings (font size, time presets for screensaver and standby, etc.)
- Static screensaver image
- Slideshow images for the screensaver
- Custom icons and symbols
- Logical functions

Upload Snapshot

serves to upload an existing snapshot

Imprint

Editor: Arcus-EDS GmbH, Rigaer Str. 88, 10247 Berlin

Responsible for the contents: Hjalmar Hevers, Reinhard Pegelow

Reprinting in part or in whole is only permitted with the prior permission of Arcus-EDS GmbH.

All information is supplied without liability. Technical specifications and prices can be subject to change.

Liability

The choice of the devices and the assessment of their suitability for a specified purpose lie solely in the responsibility of the buyer. Arcus-EDS does not take any liability or warranty for their suitability. Product specifications in catalogues and data sheets do not represent the assurance of certain properties, but derive from experience values and measurements. A liability of Arcus-EDS for damages caused by incorrect operation/projecting or malfunction of devices is excluded. The operator/project developer has to make sure that incorrect operation, planning errors and malfunctions cannot cause subsequent damages.

Safety Regulations

Attention! Installation and mounting must be carried out by a qualified electrician.

The buyer/operator of the facility has to make sure that all relevant safety regulations, issued by VDE, TÜV and the responsible energy suppliers are respected. There is no warranty for defects and damages caused by improper use of the devices or by non-compliance with the operating manuals.

Warranty

We take over guarantees as required by law.

Please contact us if malfunctions occur. In this case, please send the device including a description of the error to the company's address named below.

Manufacturer



Registered Trademarks



The CE trademark is a curb market sign that exclusively directs to authorities and does not include any assurance of product properties.



Registered trademark of the Konnex Association.