


Product data sheet

KNX RF radio transmitter module 2-gang

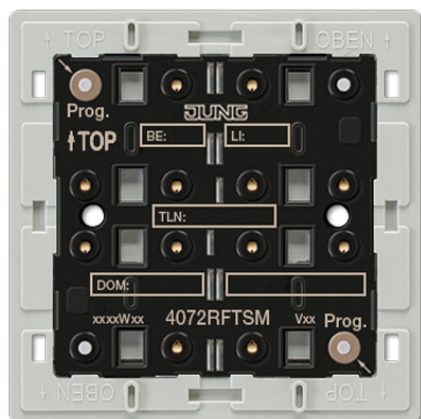

Reference number

4072 RF TSM

KNX RF radio transmitter module 2-gang

including mounting plate, adhesive pad and fastening screw

for cover kit 2-gang, ref.-no.: .. 402 TSA ..

for cover 2-gang with symbols, ref.-no.: .. 402 TSAP ..

Adapter frames are included in delivery:

ref.-no. LS 4 AR for LS range (pre-mounted) and ref.-no. CD 4 AR for CD range.

AS / A ranges without adapter frame.

ETS product family: Push-button

Product type: 2-gang push-button

2 red LEDs: actuator status

1 blue LED: transmission status

Intended use

- Radio operation of loads, e.g. light on/off, dimming, Venetian blinds up/down, brightness values, calling up and saving light scenes
- Operation in cabled KNX systems via radio converter (ref.-no.: MK 100 RF)
- Mounting on appliance box according to DIN 49073, screw fixing on walls or adhesive fixing on smooth, even surfaces (glass).

Product characteristics

- Push-button functions switching, dimming, blind control, value transmitter, scene recall, etc.
- Button pairs for push-button function or rocker function
- Status indication with LED
- Battery-powered device
- Project design and commissioning with ETS5 or a more recent version.
- Can not be combined with frames in FLAT DESIGN.

Technical data

| | |
|-----------------------------------|---------------------------------|
| Rated voltage: | DC 3 V |
| Battery type: | 1 x lithium CR 2450N (included) |
| Ambient temperature: | -5 ... +45 °C |
| Radio frequency: | 868.0 ... 868.6 MHz |
| Transmitting power: | max. 20 mW |
| Transmission range in free field: | typical 100 m |