


# Product data sheet

## Smart Control 5

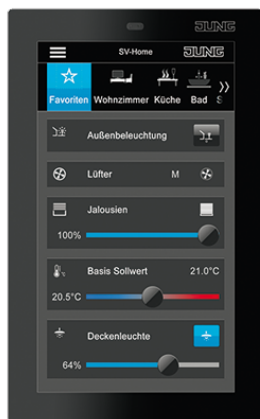

### Reference number

SC 5 SW

### Smart Control 5

#### Intended use

- Visualisation and operation of system statuses and information on building automation
- For vertical installation
- Installation in flush box with dimensions according to DIN 49073
- Ensure correct orientation when installing the flush box. Mounting screws must be in vertical alignment.

#### Product characteristics

- High performance HD screen
- Capacitive touchscreen
- Fanless, without rotating parts
- Proximity sensor
- Graphical user interface
- Brightness level of display adapts automatically to ambient brightness
- KNX visualisation in combination with Visu Pro Server (ref.-no.: JVP-SERVER-H2)
- KNX visualisation in combination with Smart Visu Server (ref.-no.: SV-SERVER-INT)
- Display of diagrams not possible
- eNet visualisation in combination with eNet server for rail mounting (ref.-no.: ENET-SERVER) with software version 2.2 or higher
- Door communication function only in combination with Siedle Smart Gateway SG 650-.. or SG 150-..
- Image memory integrated in Smart Gateway

#### Accessories:

Power supply ref.-no.: NT 2415 REG VDC

Power supply ref.-no.: NT 2405 VDC

#### Technical data

Rated voltage:	DC 24 V SELV
Rated capacity:	12 W
Screen diagonal:	127 mm / 5"
Resolution:	720 x 1280
Frame dimensions (W x H):	81 x 132 mm
Power supply:	PoE acc. to IEEE 802.3af or DC 24 V via external power supply (not included)
Processor:	Cortex-A53
Loudspeaker:	integrated
Microphone:	integrated
LAN connections:	1 x 10/100 Mbit/s
Ambient temperature:	0 ... +30 °C

#### Colour:

black