

Motion detectors

# SensIQ S KNX

Anthracite

EAN 4007841 056667

**STEINEL**<sup>®</sup>  
PROFESSIONAL



infrared sensor 3 x  
100°



3 zones scalable  
2-20m



KNX



IP54



2 - 2000 lux  
daylight operation



ideal 2 - 5 m

TEACH

Teach mode



energy saving

**5 JAHRE**  
HERSTELLER  
GARANTIE

manufacturer's  
warranty  
[steinel-professional.de/garantie](https://www.steinel-professional.de/garantie)



CE

## Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3 x 100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Including remote control and corner wall mount.

# SensIQ S KNX

Anthracite

EAN 4007841 056667

## Technical specifications

Type	Motion detectors
Type of accessory	Corner adapter
Dimensions (L x W x H)	128 x 74 x 114 mm
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors
Installation site	wall, corner
Installation	Surface wiring
Switching zones	1360 switching zones
Electronic scalability	No
Mechanical scalability	Yes
Mounting height	2,00 – 5,00 m
Optimum mounting height	2 m
Detection angle	300 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Reach, radial	r = 4 m (42 m²)

Twilight setting TEACH	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Constant-lighting control	Yes
Basic light level function	Yes
Basic light level function time	1-255 min
KNX functions	Light output 2x, Presence output, Light level, Basic light level function, Photo-cell controller, Close range
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	Yes
Interconnection	Yes
IP-rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	Anthracite
IDs, certificates	VDE
Manufacturer's Warranty	5 years
Version	Anthracite
PU1, EAN	4007841056667

## Accessories

EAN 4007841 608835	Corner wall mount sensIQ S
EAN 4007841 608804	Corner wall mount sensIQ S
EAN 4007841 608828	Corner wall mount sensIQ S
EAN 4007841 601416	Remote control RC1

Motion detectors


# SensiIQ S KNX

Anthracite

EAN 4007841 056667

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Detection Zone

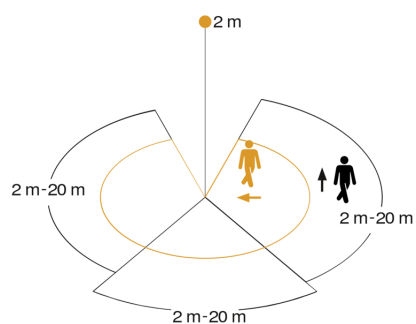

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial

Schwarz: tangential

3 skallerbare Zonen

## Dimension Drawing

