

## Motion detector

V3 KNX - surface, sq.  
EAN 4007841 058135

**STEINEL**<sup>®</sup>  
PROFESSIONAL



infrared sensor  
180°



max. 20 m



KNX



IP54



2 - 1000 lux



5 sec - 15 min



Ideal 2 m



Teach mode



energy saving



5 JAHRE  
HERSTELLER  
GARANTIE  
www.steinel.de/garantie  
manufacturer's  
warranty  
steinel-professional.de/garantie

## Function description

For large areas. Infrared motion detector IS 3180 for indoors and out, ideal for watching over large areas, ideal installation height 2 m, 180° angle of coverage, reach 20 m max. or 8 m max. (tangential), large terminal compartment for easy installation.

## Technical specifications

Type	Motion detectors	Twilight setting	2 – 1000 lx
Dimensions (L x W x H)	95 x 95 x 65 mm	Time setting	0 s – 1092 Min.
Sensor Technology	passive infrared	Basic light level function	Yes
Application, place	Indoors	KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function
Application, place, room	corridor, aisle, stairwell, multi-storey car park, underground car park	With bus coupling	Yes
Installation site	wall, corner	Material	Plastic
Type of installation	Surface wiring	Ambient temperature	-20 – 50 °C
Mounting height	1,80 – 2,50 m	Colour	white
Optimum mounting height	2 m	Version	KNX - surface, sq.
Sneak-by guard	Yes	PU1, EAN	4007841058135
Twilight setting TEACH	Yes		


## Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 648015	Corner wall mount 3000
EAN 4007841 035174	Corner wall mount 3000
EAN 4007841 592912	User remote control RC7 KNX

Motion detector

V3 KNX - surface, sq.  
EAN 4007841 058135

**Detection Zone**

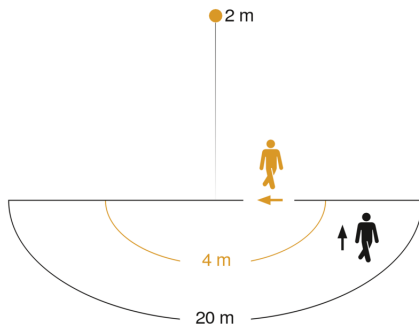

Mögliche Montagehöhe: 1,80 m – 2,50 m  
Orange: radial  
Schwarz: tangential

**Dimension Drawing**

