


Photo-cell controller

Light Sensor Dual

V3 KNX - concealed, sq.

EAN 4007841 058326

STEINEL[®]
PROFESSIONAL

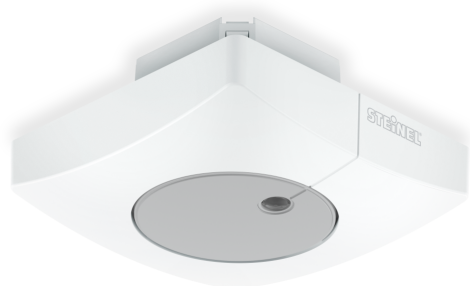

Twilight switch +
eco-mode



KNX



IP20



2 - 1000 lux



max 4 m



CE



manufacturer's
warranty
steinel-professional.de/garantie

Function description

Light measurement in perfection. The Light Sensor Dual photo-cell controller with KNX interface measures directed and diffuse light, watches over areas below the sensor and measures the room brightness. Combining the measurement results reduces error influences. Available either in round or square surface-mounted and concealed version.

Technical specifications

Type	Constant-lighting controller
Dimensions (L x W x H)	94 x 94 x 51 mm
Sensor Technology	Light sensor
Application, place	Outdoors, Indoors
Application, place, room	classroom, one-person office, open-plan office, high-bay warehouse, conference room / meeting room, Indoors
Installation site	wall, ceiling
Installation	Concealed wiring
Mounting height	2,00 – 4,00 m

Basic light level function	Yes
KNX functions	Light output 2x, Light level, Constant-lighting control, Photo-cell controller
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
IP-rating	IP54
Version	KNX - concealed, sq.
PU1, EAN	4007841058326

Photo-cell controller

Light Sensor Dual

V3 KNX - concealed, sq.

EAN 4007841 058326

STEINEL[®]
PROFESSIONAL

Dimension Drawing

