

Data sheet

KNX IP Interface 740.1 wireless

Wireless KNX IP interface



(Art. # 5419)

Application area


The KNX IP Interface 740.1 *wireless* serves as a wireless interface to the KNX bus based on WLAN. The device can be used as a programming interface for the ETS® and is a wireless alternative to USB or wired IP interfaces. The bus access via WIFI allows the installer to move freely in the building with his laptop to a large extent.

The KNX IP Interface 740.1 *wireless* has an integrated WIFI access point to which the laptop can connect. Alternatively, the device can be connected to an existing WIFI in client mode, the connection can be made via WPS (WIFI Protected Setup).

The device supports the security standard WPA2.

Power is supplied via the KNX bus.

The device works according to the KNXnet/IP specification. It can be used with the ETS® from version 5.

**Technical Specification**

Electrical safety

- Protection (acc. EN 60529): IP20

CE marking according to

- Low voltage directive 2014 / 35 / EU
- EMC directive 2014 / 30 / EU
- Radio equipment directive 2014 / 53 / EU
- RoHS directive 2011 / 65 / EU
- EN 63044-3: 2018, EN 63044-5-1: 2019
- EN 63044-5-2: 2019, EN 63044-5-3: 2019
- EN 61000-6-2: 2019
- EN 61000-6-3: 2007 + A1: 2011
- EN 300 328: V2.1.1
- EN 63000: 2018

Environmental requirements

- Ambient temp. operating: - 5 ... + 45 °C
- Ambient temp. non-op.: - 25 ... + 70 °C
- Rel. humidity (non-condensing): 5 ... 93 %

Mechanical data

- Housing: plastic (PS)
- Dimensions: 125 x 67 x 31 mm without antenna
- Weight: approx. 150 g

Controls and indicators

- 1 button and 3 LEDs (green)
- KNX programming button with LED (red)

KNX

- Medium TP
- Interface protocol: cEMI
- Max. APDU length: 55
- Device model: System B

Power supply

- KNX Bus approx. 22 mA

Connectors

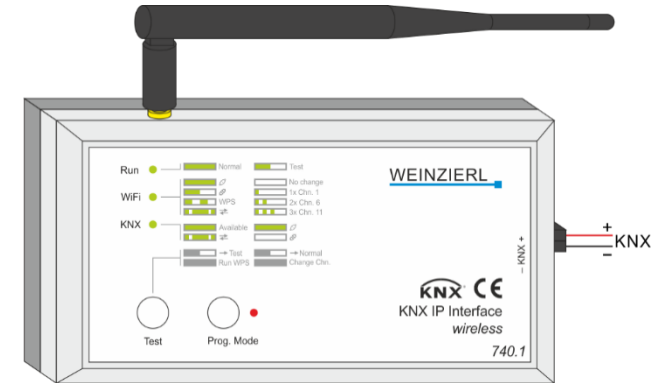
- Pluggable screw connector for KNX bus
- SMA for antenna

RF Interface

- WIFI, 802.11b/g/n, 2.4 GHz, WPA2
- Supported internet protocols ARP, ICMP, IGMP, UDP/IP and DHCP, KNXnet/IP Tunneling
- Output power: 18 dBm

Installation Instructions

- The device may be used for installations in dry locations.

**WARNING**

- The device must be mounted and commissioned by an authorized electrician.
- The prevailing safety rules must be heeded.
- The device must not be opened.
- For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.

ETS5 Database

www.weinzierl.de/en/products/740.1/ets5

Manual

www.weinzierl.de/en/products/740.1/manual

CE Declaration

www.weinzierl.de/en/products/740.1/ce-declaration
[ce-declaration](http://www.weinzierl.de/en/products/740.1/ce-declaration)


WEINZIERL ENGINEERING GmbH

Achatz 3-4

84508 Burgkirchen an der Alz

GERMANY

Tel.: +49 8677 / 916 36 - 0

E-Mail: info@weinzierl.deWeb: www.weinzierl.de