


UP 14/2 stereo

High-performance 2-way stereo ceiling speaker with plastic frame. Ideal for relatively small rooms such as bathrooms or entrance halls, where two normal stereo speakers could not be properly positioned in the classical way. The UP 14/2 Stereo comes with a 166 mm two-voice-coil woofer and two tweeters. The mounting ring is secured using four clamps and the front ring is screwed in via a bayonet connection. The EGT 14/2 housing (with moveable flange) for concrete ceilings is available as an accessory.

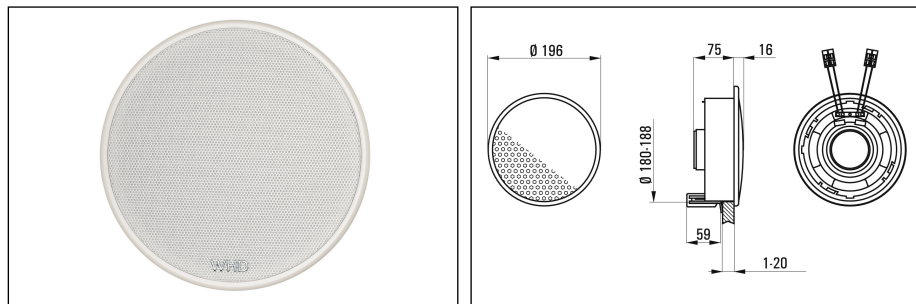

Technical Data	UP 14/2-8 stereo
Load Rating / Music Power	25/40 W
Impedance	2 x 8 Ohm
SPL 1W/1m	86 dB
SPL PNenn/1m	100 dB
SPL PNenn/1m/f	106 dB/4 kHz
Frequency Range (-3 dB)	60-23000 Hz
Frequency Range (-10 dB)	40-26000 Hz
Transmission Angle 1/2/4/8 kHz (-6 dB)	170/-/60/120 °
Component Set	1 x PM 166 DSS-8 Stereo (Coax)
Material	Front and mounting ring: plastic, grille: metal
Cut Out	ø 180 mm
Depth	75
Net Weight	1.2 kg
Colors	white (RAL 9016)
Accessories	EGT 14/2: pour-in pot, flush housing company Kaiser